


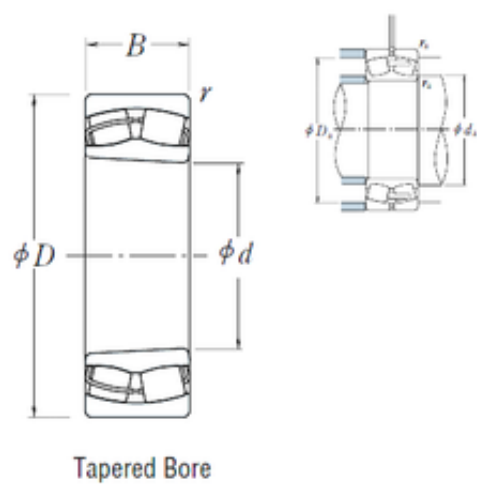

Bearing No. 24130CK30E4

r	2.1
d	150 mm
D	250 mm
B	100 mm
C	100 mm
e	0.38
Y2	2.6
C0	1530
D_	250
B_	100
Y0	1.7
ra	2
Y1	1.7
X0	1
X1	1
X2	0.67
Y3	1.8
Z_	21
DE_	224.778
DA_	25
SIR	40
DI_	176.335
bomp	24130CK30E4
SBRG	41
KBRG	2322
SDM_	200.556
ALP1	14
mass	19.8
yobi	24130CK30E4
ALP3	0

ALP2	20
da min	162
r min.	2,1 mm
da max	169 mm
Da min	212 mm
Weight	19,8 Kg
LangID	1
ALPHA_	0.25
D_a max	238
Da max.	238 mm
da min.	162 mm
Oil rpm	1400
D_a min	212
GRS rpm	1100
hidYobi	24130CK30E4
TSR rpm	1400
ra max.	2 mm
Category	Bearings
hidTable	ecat_NSSPHR
Macha rpm	0
Size (mm)	150x250x100
Inventory	0.0
Prod_Type3	SRB_CTB_TB
Width (mm)	100
Product Group	B04311
Bearing number	24130CK30E4
Manufacturer Name	NSK
Weight / Kilogram	18.2
Bore Diameter (mm)	150
Outer Diameter (mm)	250
Minimum Buy Quantity	N/A
Calculation factor (e)	0,38

(Oil) Lubrication Speed	1400 r/min
Calculation factor (Y0)	1,7
Calculation factor (Y2)	2,6
(Grease) Lubrication Speed	1100 r/min
Basic dynamic load rating (C)	890 kN
Basic static load rating (C0)	1530 kN