


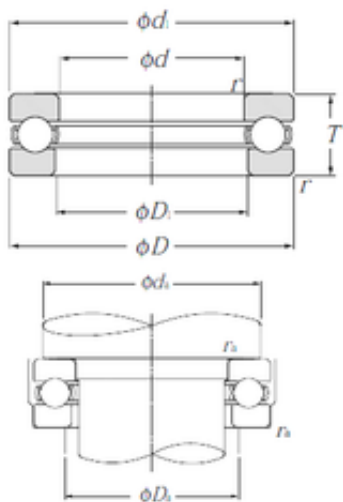

Bearing No. 51112

D	85 mm
d	60 mm
T	17 mm
d1	85 mm
D1	62 mm
Noun	Bearing
Height	0.669 Inch 17 Millimeter
Weight	0,296 Kg
Bore 2	2.441 Inch 62 Millimeter
UNSPSC	31171552
Banded	No
r min.	1 mm
Bore 1	2.362 Inch 60 Millimeter
da min.	75 mm
ra max.	1 mm
Da max.	70 mm
series:	511
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	60x85x17
Width (mm)	17
Weight / LBS	0.65257
maximum rpm:	3700 rpm
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
bore diameter:	60 mm
overall width:	17 mm

Keyword String	Ball Thrust
cage material:	Steel
fillet radius:	1 mm
Bearing number	51112
Other Features	Single Row With Flat Seat
Thrust Bearing	Yes
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	3.346 Inch 85 Millimeter
Long Description	60MM Bore 1; 62MM Bore 2; 85MM Outside Diameter; 17MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; ABEC 1 ISO P0 Precision
Manufacturer URL	http://www.ntnamerica.com
precision rating:	ISO Class 0
Weight / Kilogram	0.272
Manufacturer Name	NTN
outside diameter:	85 mm
bearing material:	High Carbon Chrome Steel
Bore Diameter (mm)	60
Outer Diameter (mm)	85
thrust bearing type:	Single-Direction
Minimum Buy Quantity	N/A
separable or banded:	Separable
static load capacity:	113000 N
Component Description	Roller Assembly Plus Raceways
dynamic load capacity:	41500 N
Harmonized Tariff Code	8482.10.50.08

Manufacturer Item Number	51112
outside diameter design:	Straight
(Grease) Lubrication Speed	2 600 r/min
Single or Double Direction	Single Direction
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	113 kN
Basic dynamic load rating (C)	41,5 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter