


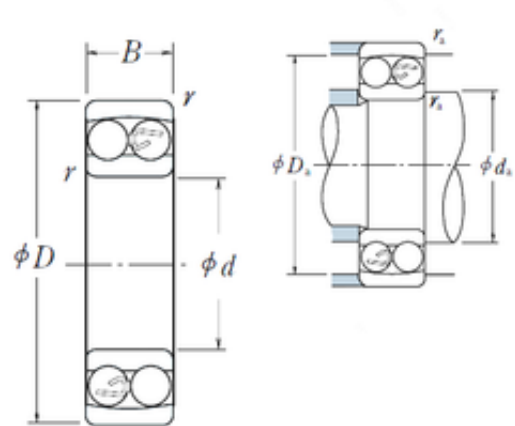

Bearing No. 1320

r	3
d	100 mm
D	215 mm
B	47 mm
C	47 mm
e	0.24
Y0	2.8
X1	1
B_	47
ra	2.5
Y2	4.1
D_	215
Y3	2.7
C0	57.5
X0	1
da	113
X2	0.65
PCD	158
D_a	202
SRI	14.57
SRE	0
mass	8.3
CAng	8.991
KBRG	1352
yobi	1320
SREX	0
SRIX	0.1
SRIN	0
SREN	0
r min.	3 mm

Weight	8,46 Kg
LangID	1
GRS rpm	2800
cyl dia	26.988
Oil rpm	3400
hidYobi	1320
da min.	113 mm
Da max.	202 mm
ra max.	2,5 mm
hidTable	ecat_NSSAB
cyl count	15
Size (mm)	100x215x47
Prod_Type3	SABB_SA_CB
Width (mm)	47
groove inner	130.984
groove outer	186.954
Bearing number	1320
Bore Diameter (mm)	100
Outer Diameter (mm)	215
Calculation factor (e)	0,24
(Oil) Lubrication Speed	3 400 r/min
Calculation factor (Y0)	2,8
Calculation factor (Y2)	4,1
(Grease) Lubrication Speed	2 800 r/min
Basic static load rating (C0)	57,5 kN
Basic dynamic load rating (C)	140 kN