


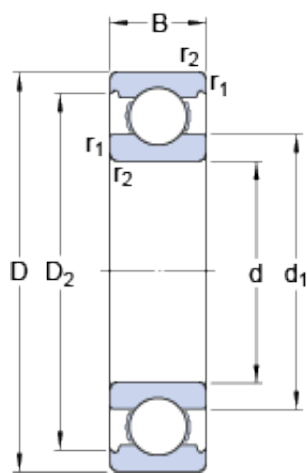

Bearing No. W 6201

D	32 mm
d	12 mm
B	10 mm
Bore	0.472 Inch 12 Millimeter
Noun	Bearing
UNSPSC	31171504
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	Open
Size (mm)	32x12x10
Snap Ring	No
Width (mm)	10
Mass bearing	0.034 kg
Weight / LBS	0.0761
Inch - Metric	Metric
Cage Material	Stainless Steel
D ₂	27.95 mm
d ₁	18.5 mm
Product Group	B00308
Other Features	Deep Groove
Keyword String	Ball
Bearing number	W 6201
Limiting speed	34000 r/min
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Reference speed	53000 r/min
Long Description	12MM Bore; 32MM Outside Diameter; 10MM Outer Race Width; Open; Ball

	Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stainless Steel
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.394 Inch 10 Millimeter
Manufacturer URL	http://www.skf.com
Outside Diameter	1.26 Inch 32 Millimeter
Weight / Kilogram	0
Manufacturer Name	SKF
D _a max.	28.5 mm
r _a max.	0.6 mm
Internal Clearance	C0-Medium
d _a min.	16 mm
Bore Diameter (mm)	32
Outer Diameter (mm)	12
d _a - min.	16 mm
d _a - max.	18 mm
D _a - max.	28.5 mm
r _a - max.	0.6 mm
Minimum Buy Quantity	N/A
r _{1,2} min.	0.6 mm
d ₁ ?	18.5 mm
D ₂ ?	27.95 mm
Harmonized Tariff Code	8482.10.50.68
r _{1,2} - min.	0.6 mm
Internal Special Features	No
Basic dynamic load rating C	5.72 kN
Basic dynamic load	5.7 kN

rating - C	
Maximum Capacity / Filling Slot	No
Fatigue load limit P_u	0.127 kN
Calculation factor k_r	0.03
Calculation factor f_0	12
Calculation factor - k_r	0.03
Fatigue load limit - P_u	0.127 kN
Calculation factor - f_0	12
Basic static load rating C_0	3 kN
Basic static load rating - C_0	3 kN