


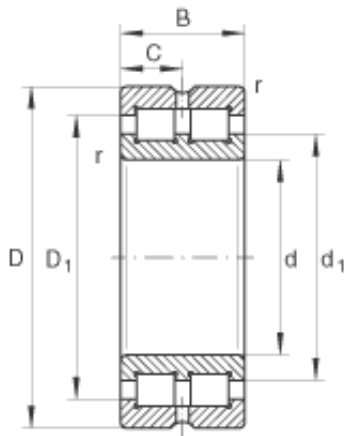

Bearing No. SL014930

	NNC4930V / Designation to DIN 5412
B	60 mm
m	6,65 kg / Weight
C	30 mm
d	150 mm
D	210 mm
Bore	5.906 Inch 150 Millimeter
Noun	Bearing
Width	2.362 Inch 60 Millimeter
UNSPSC	31171547
Profile	Complete with Outer and Inner Ring
Category	Cylindrical Roller Bearing
Retainer	No
Size (mm)	150x210x60
Inventory	0.0
Snap Ring	No
Separable	No
Width (mm)	60
Bore Profile	Straight
Weight / LBS	17.556
Cage Material	None
Inch - Metric	Metric
Product Group	B04144
C _r	410000 N / Dynamic load rating (radial)
D ₁	187,2 mm
d ₁	171,8 mm

n_G	1790 1/min / Limiting speed
Bearing number	SL014930
Other Features	Full Complement 3 Rib Inner Ring 2 Rib Outer Ring Operating Temperature From -30 to 120 Deg
Relubricatable	Yes
C_{ur}	104000 N / Fatigue limit load, radial
C_{Or}	820000 N / Static load rating (radial)
r_{min}	2 mm
Rolling Element	Cylindrical Roller Bearing
Precision Class	RBEC 1 ISO P0
Long Description	150MM Bore; Straight Bore Profile; 210MM Outside Diameter; 60MM Width; RBEC 1 ISO P0; Double Row; Not Separable; No Snap Ring; Relubricatable; C0-Medium Internal Clearance; No Retainer
Manufacturer URL	http://www.ina.com
Outside Diameter	8.268 Inch 210 Millimeter
Manufacturer Name	SCHAEFFLER GROUP
Weight / Kilogram	7.97
Internal Clearance	C0-Medium
Bore Diameter (mm)	150
Outer Diameter (mm)	210
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.50.00.00
Manufacturer Item	SL014930

Number	
Number of Rows of Rollers	Double Row