




Bearing No. SL014934

	NNC4934V / Designation to DIN 5412
D	230 mm
d	170 mm
B	60 mm
C	30 mm
m	7,35 kg / Weight
Bore	6.693 Inch 170 Millimeter
Noun	Bearing
Width	2.362 Inch 60 Millimeter
UNSPSC	31171547
Profile	Complete with Outer and Inner Ring
Retainer	No
Category	Cylindrical Roller Bearing
Inventory	0.0
Separable	No
Size (mm)	170x230x60
Snap Ring	No
Width (mm)	60
Weight / LBS	19.404
Bore Profile	Straight
Cage Material	None
Product Group	B04144
Inch - Metric	Metric
n_G	1580 1/min / Limiting speed
d_1	193,1 mm
D_1	209,1 mm

C_r	435000 N / Dynamic load rating (radial)
Relubricatable	Yes
Other Features	Full Complement 3 Rib Inner Ring 2 Rib Outer Ring Operating Temperature From -30 to 120 Deg
Bearing number	SL014934
C_{ur}	114000 N / Fatigue limit load, radial
C_{Or}	930000 N / Static load rating (radial)
r_{min}	2 mm
Rolling Element	Cylindrical Roller Bearing
Precision Class	RBEC 1 ISO P0
Long Description	170MM Bore; Straight Bore Profile; 230MM Outside Diameter; 60MM Width; RBEC 1 ISO P0; Double Row; Not Separable; No Snap Ring; Relubricatable; C0-Medium Internal Clearance; No Retainer
Manufacturer URL	http://www.ina.com
Outside Diameter	9.055 Inch 230 Millimeter
Weight / Kilogram	8.81
Manufacturer Name	SCHAEFFLER GROUP
Internal Clearance	C0-Medium
Bore Diameter (mm)	170
Outer Diameter (mm)	230
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.50.00.00
Manufacturer Item	SL014934

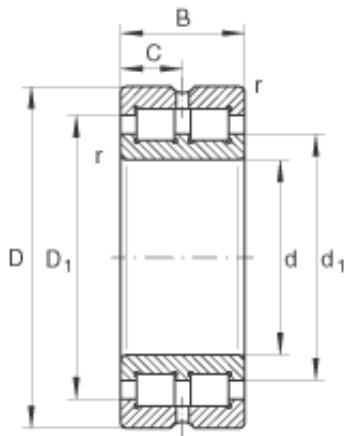

Number	
Number of Rows of Rollers	Double Row