


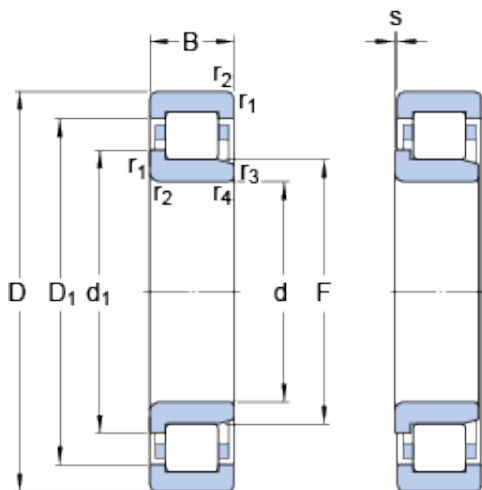

Bearing No. NJ 2240 ECML

S	5.1 mm
d	200 mm
D	360 mm
B	98 mm
F	241 mm
s max.	5.1 mm
Size (mm)	360x200x98
Width (mm)	98
Mass bearing	43.9 kg
d ₁	256 mm
D ₁	312.9 mm
Limiting speed	3200 r/min
Bearing number	NJ 2240 ECML
Reference speed	1900 r/min
Limiting value e	0.3
d _a min.	217 mm
Bore Diameter (mm)	360
D _a max.	342 mm
d _b min.	260 mm
r _a max.	3 mm
d _a max.	236 mm
Axial load factor Y	0.4
Outer Diameter (mm)	200
r _a - max.	3 mm
D _a - max.	342 mm
d _a - min.	217 mm
r _{3,4} min.	4 mm
d _b - min.	260 mm
d _a - max.	236 mm
r _{1,2} min.	4 mm

d_1 ?	256 mm
D_1 ?	312.9 mm
$r_{3,4}$ - min.	4 mm
$r_{1,2}$ - min.	4 mm
Basic dynamic load rating C	1370 kN
Basic dynamic load rating - C	1370 kN
Fatigue load limit P_u	180 kN
Calculation factor k_r	0.3
Calculation factor - k_r	0.3
Fatigue load limit - P_u	180 kN
Basic static load rating C_0	1800 kN
Basic static load rating - C_0	1800 kN