


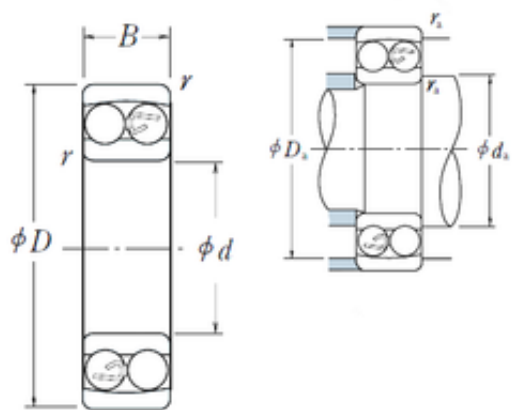

Bearing No. 2203

r	0.6
d	17 mm
D	40 mm
B	16 mm
C	16 mm
e	0.5
Y0	1.3
X1	1
B_	16
ra	0.6
Y2	1.9
D_	40
Y3	1.3
C0	2.42
X0	1
da	21
X2	0.65
PCD	27.8
D_a	36
SRI	3.33
SRE	0
mass	0.085
CAng	18.497
KBRG	1354
yobi	2203
SREX	0
SRIX	0.04
SRIN	0
SREN	0
r min.	0,6 mm

Weight	0,085 Kg
LangID	1
GRS rpm	16000
cyl dia	6.35
Oil rpm	20000
hidYobi	2203
da min.	21 mm
Da max.	36 mm
ra max.	0,6 mm
hidTable	ecat_NSSAB
cyl count	11
Size (mm)	17x40x16
Prod_Type3	SABB_SA_CB
Width (mm)	16
groove inner	21.434
groove outer	35.664
Bearing number	2203
Bore Diameter (mm)	17
Outer Diameter (mm)	40
Calculation factor (e)	0,5
(Oil) Lubrication Speed	20 000 r/min
Calculation factor (Y0)	1,3
Calculation factor (Y2)	1,9
(Grease) Lubrication Speed	16 000 r/min
Basic static load rating (C0)	2,42 kN
Basic dynamic load rating (C)	9,95 kN