


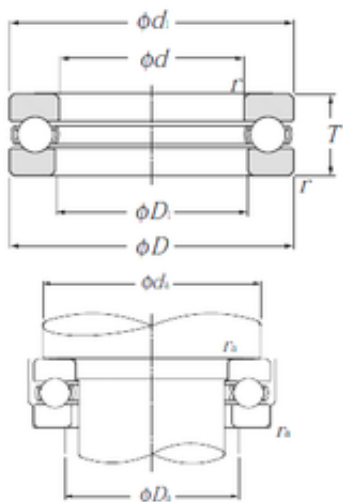

Bearing No. 51152

D	320 mm
d	260 mm
T	45 mm
d1	317 mm
D1	263 mm
Noun	Bearing
UNSPSC	31171552
Banded	No
Bore 1	10.236 Inch 260 Millimeter
Bore 2	10.354 Inch 263 Millimeter
r min.	1,5 mm
Height	1.772 Inch 45 Millimeter
Weight	7,38 Kg
ra max.	1,5 mm
Da max.	284 mm
da min.	296 mm
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	260x320x45
Width (mm)	45
Weight / LBS	16.27011
maximum rpm:	1100 rpm
Inch - Metric	Metric
Product Group	B00308
Cage Material	Steel
Other Features	Single Row With Flat Seat
Bearing number	51152

cage material:	Steel
Thrust Bearing	Yes
overall width:	45 mm
Keyword String	Ball Thrust
bore diameter:	260 mm
fillet radius:	1.5 mm
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	260MM Bore 1; 263MM Bore 2; 320MM Outside Diameter; 45MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; ABEC 1 ISO P0 Precision
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	12.598 Inch 320 Millimeter
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	6.91
Manufacturer Name	NTN
precision rating:	ISO Class 0
outside diameter:	317 mm
Bore Diameter (mm)	260
Outer Diameter (mm)	320
Minimum Buy Quantity	N/A
separable or banded:	Separable
thrust bearing type:	Single-Direction
Component Description	Roller Assembly Plus Raceways
static load capacity:	990000 N
dynamic load capacity:	232000 N
Harmonized Tariff Code	8482.10.50.08

outside diameter design:	Straight
Single or Double Direction	Single Direction
(Grease) Lubrication Speed	750 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	990 kN
Basic dynamic load rating (C)	232 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter