


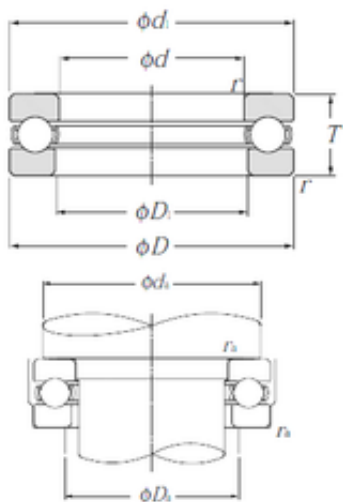

Bearing No. 51164

D	400 mm
d	320 mm
T	63 mm
D1	324 mm
d1	396 mm
Noun	Bearing
Height	2.48 Inch 63 Millimeter
Bore 1	12.598 Inch 320 Millimeter
UNSPSC	31171552
Weight	18,4 Kg
r min.	2 mm
Bore 2	12.756 Inch 324 Millimeter
Banded	No
Da max.	352 mm
ra max.	2 mm
da min.	368 mm
Category	Thrust Ball Bearings
Size (mm)	320x400x63
Inventory	0.0
Width (mm)	63
maximum rpm:	790 rpm
Weight / LBS	40.56506
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Keyword String	Ball Thrust
Other Features	Single Row With Flat Seat
bore diameter:	320 mm

Bearing number	51164
overall width:	63 mm
fillet radius:	2 mm
cage material:	Brass
Thrust Bearing	Yes
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Manufacturer URL	http://www.ntnamerica.com
Long Description	320MM Bore 1; 324MM Bore 2; 400MM Outside Diameter; 63MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; ABEC 1 ISO P0 Precision
Outside Diameter	15.748 Inch 400 Millimeter
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	17.4
outside diameter:	396 mm
Manufacturer Name	NTN
precision rating:	ISO Class 0
Bore Diameter (mm)	320
Outer Diameter (mm)	400
Minimum Buy Quantity	N/A
separable or banded:	Separable
thrust bearing type:	Single-Direction
Component Description	Roller Assembly Plus Raceways
static load capacity:	1660000 N
dynamic load capacity:	365000 N
Harmonized Tariff Code	8482.10.50.08
Manufacturer Item Number	51164

outside diameter design:	Straight
Single or Double Direction	Single Direction
(Grease) Lubrication Speed	550 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	1 660 kN
Basic dynamic load rating (C)	365 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter