


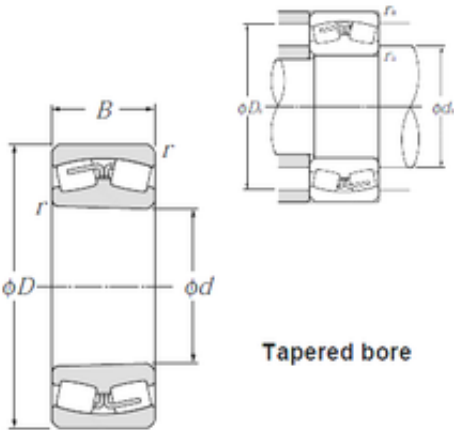

Bearing No. 24056BK30

C	140 mm
d	280 mm
D	420 mm
B	140 mm
Bore	11.024 Inch 280 Millimeter
Noun	Bearing
Width	5.512 Inch 140 Millimeter
UNSPSC	31171510
Weight	67,9 Kg
r min.	4 mm
Da max.	402 mm
ra max.	3 mm
da min.	298 mm
Category	Spherical Roller Bearing
Size (mm)	280x420x140
Enclosure	Open
Inventory	0.0
Width (mm)	140
Bore Profile	Tapered
Weight / LBS	147.179
Cage Material	Bronze
Inch - Metric	Metric
Product Group	B04311
Relubricatable	Yes
Withdrawal Nut	HM58T
Other Features	Order adapter or withdrawal sleeve or nut separately. Others may be available
Keyword String	Spherical

Bearing number	24056BK30
Mounting Method	Adapter Mount
Rolling Element	Spherical Roller Bearing
Outside Diameter	16.535 Inch 420 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Long Description	280MM Tapered Bore; 420MM Outside Diameter; 140MM Width; C0-Medium Clearance; Adapter Mount; Double Row of Spherical Roller Bearings; Bronze Cage Material; Open Enclosure; Relubricatable
Withdrawal Sleeve	AH24056H (Specify bore)
Manufacturer Name	NTN
Weight / Kilogram	66.82
Internal Clearance	C0-Medium
Bore Diameter (mm)	280
Outer Diameter (mm)	420
Minimum Buy Quantity	N/A
Calculation factor (e)	0,33
Harmonized Tariff Code	84823080
Calculation factor (Y1)	2,06
Calculation factor (Y0)	2,02
(Oil) Lubrication Speed	900 r/min
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	690 r/min
Basic static load rating (C0)	3 950 kN

Basic dynamic load rating (C)	1 950 kN
-------------------------------	----------