


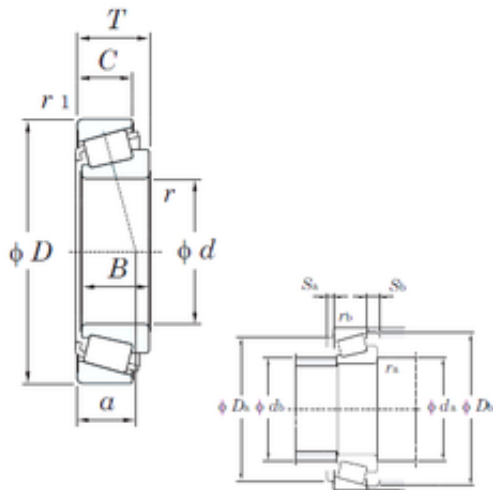

Bearing No. 18685/18620

|                               |                     |
|-------------------------------|---------------------|
| B                             | 17,462 mm           |
| d                             | 44,45 mm            |
| D                             | 79,375 mm           |
| T                             | 17,462 mm           |
| C                             | 13,495 mm           |
| a                             | 16 mm               |
| Db                            | 74 mm               |
| Da                            | 71 mm               |
| r min.                        | 2,8 mm              |
| Weight                        | 0,34 Kg             |
| db min                        | 49,5 mm             |
| da min.                       | 54 mm               |
| r2 min.                       | 1,6 mm              |
| rb max.                       | 1,6 mm              |
| ra max.                       | 2,8 mm              |
| Size (mm)                     | 44.45x79.375x17.462 |
| Width (mm)                    | 17,462              |
| Bearing number                | 18685/18620         |
| Bore Diameter (mm)            | 44,45               |
| Outer Diameter (mm)           | 79,375              |
| Calculation factor (e)        | 0,37                |
| (Oil) Lubrication Speed       | 6400 r/min          |
| Calculation factor (Y0)       | 0,88                |
| (Grease) Lubrication Speed    | 4800 r/min          |
| Basic dynamic load rating (C) | 47,1 kN             |
| Basic static load rating (C0) | 59,1 kN             |