




Bearing No. RNAO55X68X20

C	20 mm
m	166 g / Weight
E	60 mm
D	68 mm
Noun	Bearing
Bore	2.165 Inch 55 Millimeter
Width	0.787 Inch 20 Millimeter
UNSPSC	31171512
Category	Needle Non Thrust Roller Bearing
Retainer	Yes
Separable	Outer Ring - Both Sides
Inventory	0.0
Enclosure	Open
Component	Roller Assembly with Outer Ring - No Inner Ring
Size (mm)	55x68x20
Closed End	No
Width (mm)	20
Weight / LBS	0.366
Inch - Metric	Metric
Self Aligning	No
Product Group	B04144
n_B	4850 1/min / Reference speed
n_G	8500 1/min / Limiting speed
C_r	32000 N / Dynamic load rating (radial)
d	59,4 mm

b	
D _b	55,8 mm
D _a	60,8 mm
F _w	55 mm
Keyword String	Needle
Other Features	Plain Outer Ring Precision Bearing Steel Cage Ground Raceway
C _{ur}	10700 N / Fatigue limit load, radial
C _{0r}	66000 N / Static load rating (radial)
Relubricatable	No
Thrust Bearing	No
Bearing number	RNAO55X68X20
Rolling Element	Needle Roller Bearing
r _{min}	0,6 mm
Manufacturer URL	http://www.ina.com
Outside Diameter	2.677 Inch 68 Millimeter
Long Description	55MM Bore; 68MM Outside Diameter; 20MM Width; Needle Roller Bearing; Roller Assembly with Outer Ring - No Inner Ring; Open Enclosure; No Self Aligning; Retainer; Single Row of Rollers; Outer Ring - Bo
Manufacturer Name	SCHAEFFLER GROUP
r _{a max}	0,6 mm
Weight / Kilogram	0.17
Bore Diameter (mm)	55
Outer Diameter (mm)	68
Minimum Buy Quantity	N/A

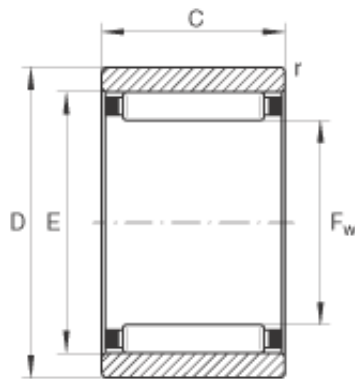

Harmonized Tariff Code	8482.40.00.00
Manufacturer Item Number	RNAO55X68X20
Number of Rows of Rollers	Single Row