


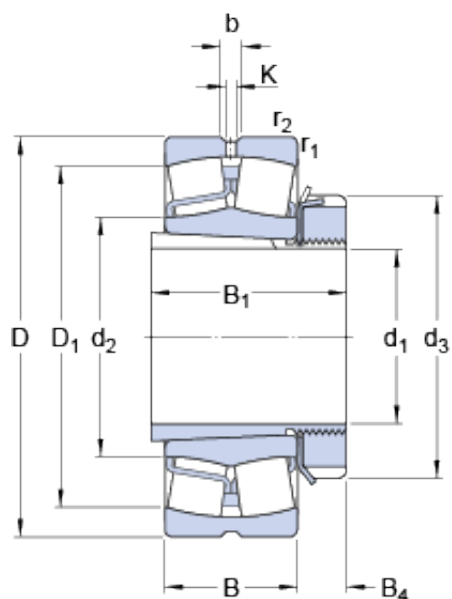

Bearing No. 22226 EK + H 3126

D	230 mm
B	64 mm
b	11.1 mm
K	6 mm
Size (mm)	230x115x64
Width (mm)	64
d ₃	165 mm
d ₁	115 mm
B ₄	23 mm
B ₁	92 mm
d ₁	115 mm
d ₂	152 mm
D ₁	201 mm
B ₁	92 mm
B ₄	23 mm
d ₃	165 mm
Bearing number	22226 EK + H 3126
Limiting speed	3600 r/min
Reference speed	2600 r/min
Bore Diameter (mm)	230
r _a max.	2.5 mm
B _a min.	8 mm
D _a max.	216 mm
d _b min.	138 mm
d _a max.	152 mm
Outer Diameter (mm)	115
Calculation factor e	0.27
r _{1,2} min.	3 mm
r _a - max.	2.5 mm

B _a - min.	8 mm
D _a - max.	216 mm
d _b - min.	138 mm
d _a - max.	152 mm
d ₂ ?	152 mm
Mass bearing + sleeve	14 kg
D ₁ ?	201 mm
Calculation factor - e	0.27
r _{1,2} - min.	3 mm
Basic dynamic load rating C	758 kN
Basic dynamic load rating - C	758 kN
Fatigue load limit P _u	88 kN
Calculation factor Y ₁	2.5
Calculation factor Y ₂	3.7
Calculation factor Y ₀	2.5
Calculation factor - Y ₁	2.5
Calculation factor - Y ₂	3.7
Fatigue load limit - P _u	88 kN
Basic static load rating C ₀	930 kN
Basic static load rating - C ₀	930 kN