


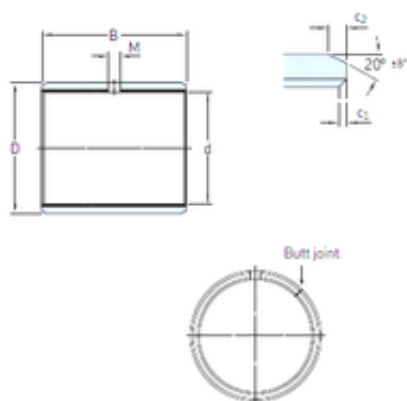

Bearing No. PCZ 2222 M

D	38,894 mm
d	34,925 mm
B	34,925 mm
M	4 mm
Weight	0,054 Kg
c1 min	0,1 mm
c2 min	0,8 mm
Size (mm)	34.925x38.894x34.925
Width (mm)	34,925
Mass bushing	0.054 kg
? ±8	20 °
Bearing number	PCZ 2222 M
c ₂ max.	1.6 mm
c ₁ min.	0.1 mm
c ₁ max.	0.7 mm
c ₂ min.	0.8 mm
Bore Diameter (mm)	34,925
Outer Diameter (mm)	38,894
Housing bore range min.	38.895 mm
Housing bore range max.	38.918 mm
Shaft diameter range min.	34.592 mm
Shaft diameter range max.	34.633 mm
Basic dynamic load rating (C)	143 kN
Specific dynamic load factor K	120 N/mm ²
Permissible sliding velocity v min.	0 m/s
Permissible sliding	2.5 m/s

velocity v max.	
Coefficient of friction μ min.	0.02
Coefficient of friction μ max.	0.2
Specific static load factor K_0	250 N/mm ²
Basic dynamic load rating - radial direction C	143 kN
Basic static load rating - radial direction C_0	300 kN
Factor depending on material and bearing type K_M	1900