


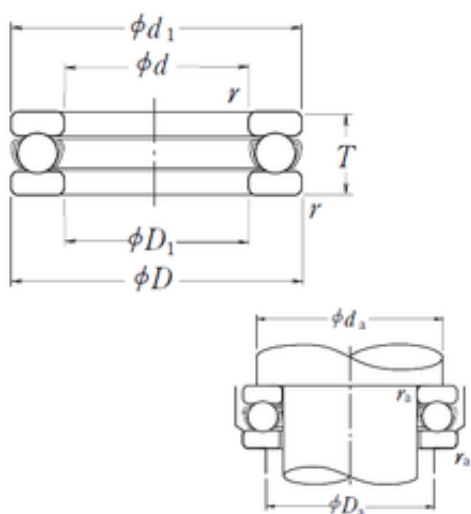

Bearing No. 51411

C	181
r	1.5
d	55 mm
D	120 mm
T	48 mm
D1	57 mm
da	94
ra	1.5
B_	48
C0	350
d1	120 mm
D_	120
T_	48
Z_	10
DA_	23.812
SRE	12.9
D_a	81
D_1	57
SRI	12.9
KBRG	5111
SREN	0
Noun	Bearing
SRIX	0.08
SRIN	0
mass	2.58
SDM_	87.5
SREX	0.08
yobi	51411
r min.	1,5 mm
Banded	No

Bore 2	2.244 Inch 57 Millimeter
Weight	2,58 Kg
LangID	1
Bore 1	2.165 Inch 55 Millimeter
UNSPSC	31171552
Height	1.89 Inch 48 Millimeter
Oil rpm	1900
da min.	94 mm
GRS rpm	1300
Da max.	81 mm
ra max.	1,5 mm
hidYobi	51411
Category	Thrust Ball Bearings
hidTable	ecat_NSSDTB
Size (mm)	55x120x48
Inventory	0.0
Width (mm)	48
Prod_Type3	TB_SD_WFS
Weight / LBS	5.68793
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	51411
overall width:	48 mm
Keyword String	Ball Thrust
Thrust Bearing	Yes
bore diameter:	55 mm
Other Features	Single Row With Flat Seat
Rolling Element	Ball Bearing
Precision Class	Non-Precision

Manufacturer URL	http://www.nskamericas.com
Long Description	55MM Bore 1; 57MM Bore 2; 120MM Outside Diameter; 48MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Outside Diameter	4.724 Inch 120 Millimeter
Weight / Kilogram	2.64
Manufacturer Name	NSK
outside diameter:	120 mm
Bore Diameter (mm)	55
Outer Diameter (mm)	120
thrust bearing type:	Single-Direction
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
manufacturer upc number:	029176062360
Manufacturer Item Number	51411
Single or Double Direction	Single Direction
(Grease) Lubrication Speed	1300 r/min
Basic static load rating (C0)	350 kN
Basic dynamic load rating (C)	181 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter