


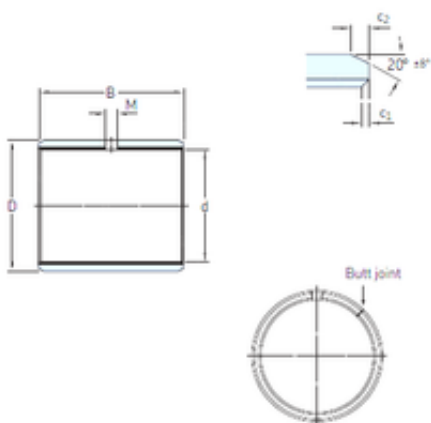

Bearing No. PCM 606530 E

D	65 mm
d	60 mm
B	30 mm
M	– mm
c1 min	0,2 mm
Weight	0,11 Kg
c2 min	1,2 mm
Category	Plain Bearings
Size (mm)	60x65x30
Inventory	0.0
Width (mm)	30
Mass bushing	0.11 kg
groove type:	Plain Interior
ground type:	Ground
? ±8	20 °
Product Group	B04264
bushing type:	Plain
Bearing number	PCM 606530 E
Tolerance shaft	f7
overall length:	30 mm
inside diameter:	60 mm
Weight / Kilogram	0.126
bushing material:	PTFE
Manufacturer Name	SKF
Tolerance housing	H7
c ₂ min.	1.2 mm
c ₂ max.	2.4 mm
Bore Diameter (mm)	60
c ₁ max.	1 mm
c ₁ min.	0.2 mm

Outer Diameter (mm)	65
Minimum Buy Quantity	N/A
bushing outside diameter:	65 mm
overall outside diameter:	65 mm
Basic dynamic load rating (C)	140 kN
Specific dynamic load factor K	80 N/mm ²
Permissible sliding velocity v min.	0 m/s
Permissible sliding velocity v max.	2 m/s
Coefficient of friction μ min.	0.03
Coefficient of friction μ max.	0.25
Specific static load factor K_0	250 N/mm ²
Basic dynamic load rating - radial direction C	140 kN
Basic static load rating - radial direction C_0	440 kN
Factor depending on material and bearing type K_M	480