


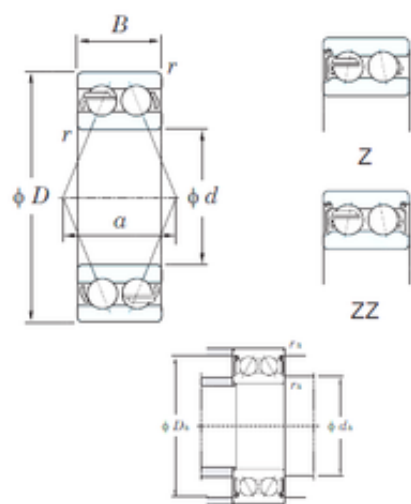

Bearing No. 5204ZZ

D	47 mm
d	20 mm
B	20.6 mm
C	20.6 mm
a	23.5 mm
Bore	0.787 Inch 20 Millimeter
Noun	Bearing
Width	0.811 Inch 20.6 Millimeter
UNSPSC	31171531
r min.	1 mm
Weight	0.120 Kg
da max	26.6 mm
ra max.	1 mm
Da max.	41.5 mm
da min.	25.5 mm
Category	Angular Contact Ball Bearing
Snap Ring	No
Inventory	0.0
Size (mm)	20x47x20.6
Enclosure	2 Metal Shields
Width (mm)	20.6
Flush Ground	No
Inch - Metric	Metric
Contact Angle	24 Degree
Product Group	B00152
Cage Material	Steel
Keyword String	Angular Contact
Bearing number	5204ZZ

Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Manufacturer URL	http://www.koyousa.com
Outside Diameter	1.85 Inch 47 Millimeter
Long Description	20MM Bore; 47MM Outside Diameter; 20.6MM Width; 2 Metal Shields; No Flush Ground; Ball Bearing; Double Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 24 Degree; 1
Manufacturer Name	KOYO
Weight / Kilogram	0.178
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Bore Diameter (mm)	20
Outer Diameter (mm)	47
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Double Row
Basic static load rating (C0)	10.8 kN
Basic dynamic load rating (C)	16.0 kN
Maximum Capacity / Filling Slot	No