


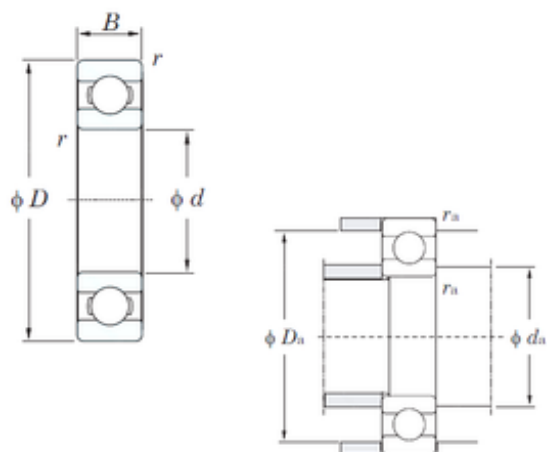

Bearing No. 16004

D	42 mm
d	20 mm
B	8 mm
C	8 mm
f0	14.4
Cu	0.290
Cr	9.90
C0r	4.50
Bore	0.787 Inch 20 Millimeter
Noun	Bearing
UNSPSC	31171504
Weight	0,05 Kg
r(min)	0.3
r min.	0,3 mm
da min.	22 mm
ra(max)	0.3
Da max.	40 mm
Da(max)	40
da(min)	22
ra max.	0,3 mm
Category	Single Row Ball Bearing
Oil lub.	21000
Inventory	0.0
Enclosure	Open
Size (mm)	20x42x8
Snap Ring	No
Width (mm)	8
Grease lub.	17000
Bearing No.	16004

Weight / LBS	0.119
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Keyword String	Ball
Bearing number	16004
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	1.654 Inch 42 Millimeter
Long Description	20MM Bore; 42MM Outside Diameter; 8MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outer Race Width	0.315 Inch 8 Millimeter
(Refer.)Mass(kg)	0.050
Manufacturer URL	http://www.koyousa.com
Weight / Kilogram	0.054
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	20
Outer Diameter (mm)	42
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	21000 r/min
Manufacturer Item Number	16004
Internal Special Features	No
(Grease) Lubrication Speed	17000 r/min
Basic static load rating	4,5 kN

(C0)	
Basic dynamic load rating (C)	7,95 kN
Maximum Capacity / Filling Slot	No