


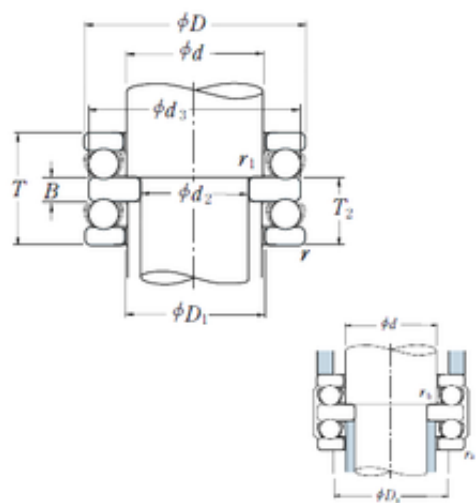

Bearing No. 52306

B	9 mm
T	38 mm
d	30 mm
D	60 mm
D1	32 mm
d3	60 mm
T2	23,5 mm
d2	25 mm
Noun	Bearing
Height	1.496 Inch 38 Millimeter
r min.	1 mm
Bore 2	1.26 Inch 32 Millimeter
UNSPSC	31171552
Bore 1	0.984 Inch 25 Millimeter
Banded	No
Weight	0,483 Kg
Da max.	45 mm
rb max.	0,3 mm
ra max.	1 mm
r1 min.	0,3 mm
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	30x60x38
Width (mm)	38
Weight / LBS	1.06483
Inch - Metric	Metric
Product Group	B00308
Cage Material	Steel
Keyword String	Ball Thrust

bore diameter:	25 mm
Other Features	Double Row With Flat Seat
Bearing number	52306
overall width:	38 mm
Thrust Bearing	Yes
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	2.362 Inch 60 Millimeter
Long Description	25MM Bore 1; 32MM Bore 2; 60MM Outside Diameter; 38MM Height; Ball Bearing; Double Direction; Not Banded; Steel Cage; Non-Precision
Weight / Kilogram	0.49
Manufacturer Name	NSK
outside diameter:	60 mm
Bore Diameter (mm)	30
Outer Diameter (mm)	60
thrust bearing type:	Double-Direction
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
manufacturer upc number:	029176062483
Manufacturer Item Number	52306
(Grease) Lubrication Speed	2600 r/min
Single or Double	Double Direction

Direction	
Basic dynamic load rating (C)	43 kN
Basic static load rating (C0)	78,5 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter