


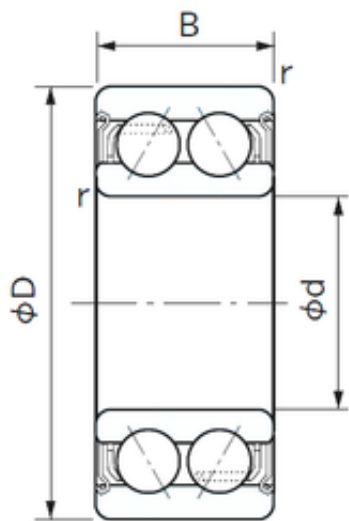

Bearing No. 5212ZZ

D	110 mm
d	60 mm
B	36.5 mm
C	36.5 mm
ra	1.5 mm
Da	101 mm
da	69 mm
Noun	Bearing
Bore	2.362 Inch 60 Millimeter
Width	1.437 Inch 36.5 Millimeter
UNSPSC	31171531
r min.	1.5 mm
Weight	1.36 Kg
Category	Angular Contact Ball Bearing
Inventory	1.0
Size (mm)	60x110x36.5
Bore Type	Cylindrical Bore
Enclosure	2 Metal Shields
Bore Size	60 mm
Snap Ring	No
Width (mm)	36.5
Weight / LBS	3
Flush Ground	No
Configuration	Double Row
Inch - Metric	Metric
Contact Angle	20 Degree
Cage Material	Steel
Product Group	B00152

Bearing number	5212ZZ
Keyword String	Angular Contact
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Radial Clearance	0.008 to 0.028 mm
Manufacturer URL	http://www.nachi.com
Outside Diameter	4.331 Inch 110 Millimeter
Long Description	60MM Bore; 110MM Outside Diameter; 36.5MM Width; 2 Metal Shields; No Flush Ground; Ball Bearing; Double Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring
Weight / Kilogram	1.362
Manufacturer Name	NACHI
Internal Clearance	C0-Medium
Bore Diameter (mm)	60
Static Load Rating	57,500 N
Number of Bearings	1 (Single)
Outer Diameter (mm)	110
Dynamic Load Rating	67,000 N
Minimum Buy Quantity	N/A
Limiting Speed - Oil	4,300 rpm
Fillet Radius/Chamfer	1.5 mm
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Double Row
Manufacturer Item Number	5212 ZZ BV2S
Basic dynamic load rating (C)	67 kN
Basic static load rating (C0)	57,5 kN

Maximum Capacity / Filling Slot	No
------------------------------------	----