


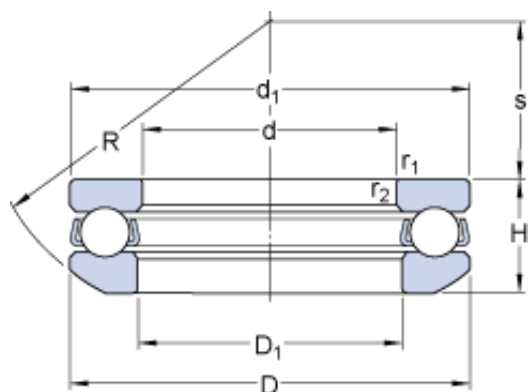

Bearing No. 53204 + U 204

S	18 mm
R	36 mm
d	20 mm
D	40 mm
H	14.7 mm
C	5 mm
Size (mm)	40x20x14.7
Width (mm)	14,7
D ₁	22 mm
D ₃	42 mm
H ₁	17 mm
D ₂	30 mm
d ₁	40 mm
H ₁	17 mm
D ₃	42 mm
D ₂	30 mm
Limiting speed	8000 r/min
Bearing number	53204 + U 204
Reference speed	5600 r/min
d _a min.	32 mm
D _a max.	30 mm
r _a max.	0.6 mm
Bore Diameter (mm)	40
Outer Diameter (mm)	20
r _a - max.	0.6 mm
D _a - max.	30 mm
r _{1,2} min.	0.6 mm
d _a - min.	32 mm
Minimum load factor A	0.0085

d_1 ?	40 mm
D_1 ?	22 mm
$r_{1,2}$ - min.	0.6 mm
Minimum load factor - A	0.0085
Basic dynamic load rating C	21.2 kN
Basic dynamic load rating - C	21.2 kN
Fatigue load limit P_u	1.4 kN
Fatigue load limit - P_u	1.4 kN
Basic static load rating C_0	37.5 kN
Basic static load rating - C_0	37.5 kN
Mass bearing (including seat washer where applicable)	0.1 kg