


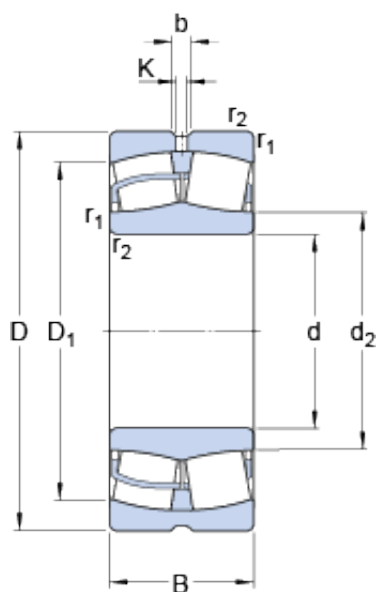

Bearing No. 22336 CCJA/W33VA405

D	380 mm
d	180 mm
B	126 mm
b	22.3 mm
K	12 mm
Bore	7.087 Inch 180 Millimeter
Noun	Bearing
Width	4.961 Inch 126 Millimeter
UNSPSC	31171510
Category	Spherical Roller Bearing
Inventory	0.0
Size (mm)	380x180x126
Enclosure	Open
Width (mm)	126
Bore Profile	Straight
Mass bearing	71.5 kg
Weight / LBS	158.512
Inch - Metric	Metric
Cage Material	Steel
D ₁	317 mm
d ₂	224 mm
Product Group	B04311
Withdrawal Nut	Not Applicable
Relubricatable	Yes
Keyword String	Spherical
Bearing number	22336 CCJA/W33VA405
Limiting speed	1700 r/min
Mounting Method	Shaft Mount

Rolling Element	Spherical Roller Bearing
Reference speed	1300 r/min
Long Description	180MM Straight Bore; 380MM Outside Diameter; 126MM Width; C0-Medium Clearance; Shaft Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable
Outside Diameter	14.961 Inch 380 Millimeter
Manufacturer URL	http://www.skf.com
Withdrawal Sleeve	Not Applicable
Weight / Kilogram	71.96
Manufacturer Name	SKF
Internal Clearance	C0-Medium
d _a min.	197 mm
D _a max.	363 mm
r _a max.	3 mm
Bore Diameter (mm)	380
Adapter Part Number	Not Applicable Inch Not Applicable Millimeter
Outer Diameter (mm)	180
d _a - min.	197 mm
Calculation factor e	0.35
r _{1,2} min.	4 mm
D _a - max.	363 mm
Minimum Buy Quantity	N/A
r _a - max.	3 mm
d ₂ ?	224 mm
D ₁ ?	317 mm
Calculation factor - e	0.35
	4 mm

r _{1,2} - min.	
-------------------------	--

Harmonized Tariff Code	84823080
Number of Rows of Rollers	Double Row
Basic dynamic load rating C	2077 kN
Basic dynamic load rating - C	2077 kN
Calculation factor Y_1	1.9
Fatigue load limit P_u	193 kN
Calculation factor Y_2	2.9
Calculation factor Y_0	1.8
Calculation factor - Y_2	2.9
Fatigue load limit - P_u	193 kN
Calculation factor - Y_0	1.8
Calculation factor - Y_1	1.9
Basic static load rating C_0	2450 kN
Basic static load rating - C_0	2450 kN
Permissible linear acceleration (oil lubrication)	167 g [m/s]
Permissible rotational acceleration (oil lubrication)	579 g [m/s]