


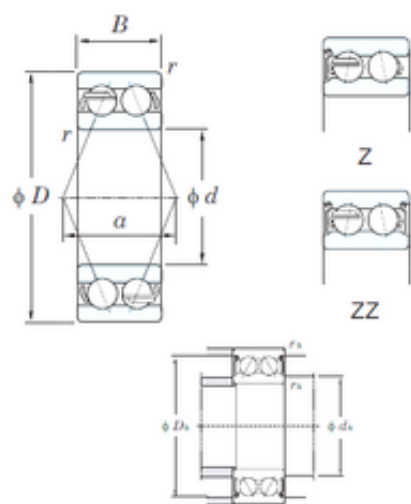

Bearing No. 5306ZZ

D	72 mm
d	30 mm
B	30.2 mm
C	30.2 mm
a	36.2 mm
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
Width	1.189 Inch 30.2 Millimeter
UNSPSC	31171531
r min.	1.1 mm
Weight	0.510 Kg
da max	41.3 mm
ra max.	1 mm
Da max.	65 mm
da min.	37 mm
Category	Angular Contact Ball Bearing
Snap Ring	No
Inventory	0.0
Size (mm)	30x72x30.2
Enclosure	2 Metal Shields
Width (mm)	30.2
Flush Ground	No
Inch - Metric	Metric
Contact Angle	24 Degree
Product Group	B00152
Cage Material	Steel
Keyword String	Angular Contact
Bearing number	5306ZZ

Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Manufacturer URL	http://www.koyousa.com
Outside Diameter	2.835 Inch 72 Millimeter
Long Description	30MM Bore; 72MM Outside Diameter; 30.2MM Width; 2 Metal Shields; No Flush Ground; Ball Bearing; Double Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 24 Degree; 1
Manufacturer Name	KOYO
Weight / Kilogram	0.625
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Bore Diameter (mm)	30
Outer Diameter (mm)	72
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Double Row
Basic static load rating (C0)	25.2 kN
Basic dynamic load rating (C)	34.3 kN
Maximum Capacity / Filling Slot	No