


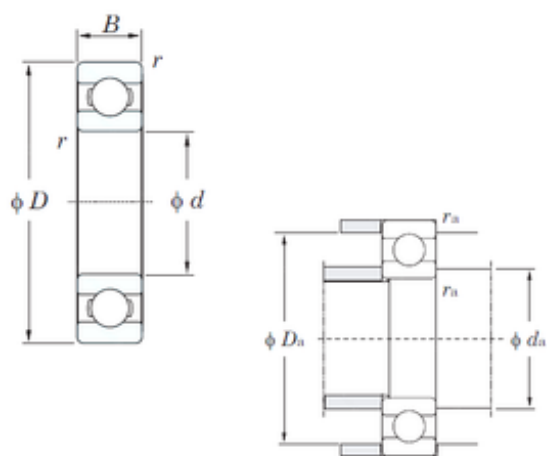

Bearing No. 6005

D	47 mm
d	25 mm
B	12 mm
C	12 mm
f0	14.5
Cu	0.380
Cr	12.6
C0r	5.85
Bore	0.984 Inch 25 Millimeter
Noun	Bearing
UNSPSC	31171504
Weight	0,08 Kg
r(min)	0.6
r min.	0,6 mm
da min.	29 mm
ra(max)	0.6
Da max.	43 mm
Da(max)	43
da(min)	29
ra max.	0,6 mm
Category	Single Row Ball Bearing
Oil lub.	18000
Inventory	0.0
Enclosure	Open
Size (mm)	25x47x12
Snap Ring	No
Width (mm)	12
Grease lub.	15000
Bearing No.	6005

Weight / LBS	0.191
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Keyword String	Ball
Bearing number	6005
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Long Description	25MM Bore; 47MM Outside Diameter; 12MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	1.85 Inch 47 Millimeter
Outer Race Width	0.472 Inch 12 Millimeter
(Refer.)Mass(kg)	0.080
Manufacturer URL	http://www.koyousa.com
Weight / Kilogram	0.087
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	25
Outer Diameter (mm)	47
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	18000 r/min
Manufacturer Item Number	6005
Internal Special Features	No
(Grease) Lubrication Speed	15000 r/min
Basic static load rating	5,85 kN

(C0)	
Basic dynamic load rating (C)	10,1 kN
Maximum Capacity / Filling Slot	No