


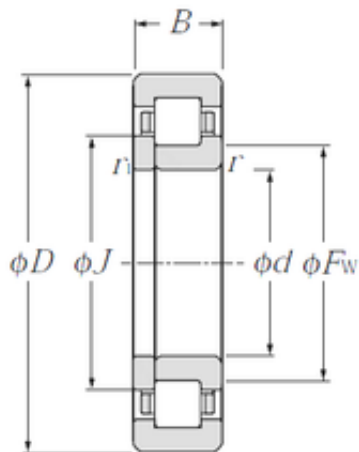

Bearing No. NUP2306E

J	44,9 mm
D	72 mm
F	40.5 mm
C	27 mm
E	62.5 mm
B	27 mm
d	30 mm
Fw	40,5 mm
d1	44.9 mm
rs min	1.1 mm
r min.	1,1 mm
da min	36.5 mm
Weight	0,58 Kg
ra max	1 mm
Da max	65.5 mm
dc min	48 mm
r1s min	1.1 mm
r1 min.	1,1 mm
Category	Bearings
Inventory	0.0
Size (mm)	30x72x27
Nlim (oil)	9,700 rpm
Width (mm)	27
Product Group	B04144
Nlim (grease)	8,300 rpm
Bearing number	NUP2306E
Static load, C0	77.5 kN
Dynamic load, C	74.5 kN
Weight / Kilogram	0.58
Manufacturer Name	NTN

Bore Diameter (mm)	30
Outer Diameter (mm)	72
Minimum Buy Quantity	N/A
Fatigue limit load, Cu	9.5 kN
Mass (without HJ ring)	0.58 kg
Radial clearance class	CN
(Grease) Lubrication Speed	8 300 r/min
Basic static load rating (C0)	77,5 kN
Basic dynamic load rating (C)	74,5 kN
Max operating temperature, Tmax	120 °C
Min operating temperature, Tmin	-20 °C
Characteristic cage frequency, FTF	0.39 Hz
Characteristic inner ring frequency, BPFI	7.28 Hz
Characteristic outer ring frequency, BPF0	4.72 Hz
Characteristic rolling element frequency, BSF	4.47 Hz