


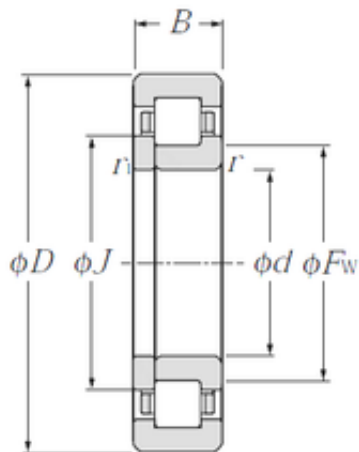

Bearing No. NUP228

J	179,5 mm
D	250 mm
F	169 mm
C	42 mm
E	221 mm
B	42 mm
d	140 mm
Fw	169 mm
d1	179.5 mm
rs min	3 mm
r min.	3 mm
da min	153 mm
Weight	7,88 Kg
ra max	2.5 mm
Da max	237 mm
dc min	182 mm
r1s min	3 mm
r1 min.	3 mm
Category	Bearings
Inventory	0.0
Size (mm)	140x250x42
Nlim (oil)	3,100 rpm
Width (mm)	42
Product Group	B04144
Nlim (grease)	2,700 rpm
Bearing number	NUP228
Static load, C0	400 kN
Dynamic load, C	310 kN
Weight / Kilogram	8.58
Manufacturer Name	NTN

Bore Diameter (mm)	140
Outer Diameter (mm)	250
Minimum Buy Quantity	N/A
Fatigue limit load, Cu	39.9 kN
Mass (without HJ ring)	8.58 kg
Radial clearance class	CN
(Grease) Lubrication Speed	2 700 r/min
Basic static load rating (C0)	400 kN
Basic dynamic load rating (C)	310 kN
Max operating temperature, Tmax	120 °C
Min operating temperature, Tmin	-40 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic inner ring frequency, BPFI	9.63 Hz
Characteristic outer ring frequency, BPF0	7.37 Hz
Characteristic rolling element frequency, BSF	7.37 Hz