


Bearing No. TASE40-N



N	14 mm
d	40 mm
A	48 mm
H	49,2 mm
J	138 mm
L	179 mm
N1	26 mm
S1	35,1 mm
d3	58 mm
A1	30 mm
B1	56,5 mm
H1	19 mm
H2	99 mm
Noun	Bearing
Bore	1.575 Inch 40 Millimeter
Seals	Double Triply
Weight	1,96 Kg
UNSPSC	31171511
Category	Pillow Block
Inventory	0.0
Thread (Q)	Rp1/8
Weight / LBS	4.631
Product Group	M06110
Inch - Metric	Metric
Housing Style	2 Bolt Pillow Block
Relubricatable	Yes
Keyword String	Pillow Block
Other Features	Single Row Radial Standard Shaft Height Metric With Set Screw

Bearing number	TASE40-N
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Manufacturer URL	http://www.ina.com
Long Description	2 Bolt Pillow Block; 40MM Bore; 49.2MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 125MM Minimum Bolt Spacing; 147MM Maximum Bolt Spacing; Relubricatable; Cast Iron; Double Triply; No
Length Thru Bore	2.217 Inch 56.3 Millimeter
Housing Material	Cast Iron
Weight / Kilogram	2.263
Manufacturer Name	SCHAEFFLER GROUP
Insert Part Number	GE40KPPB3
Bore Diameter (mm)	40
Bolt Spacing Minimum	4.921 Inch 125Millimeter
Bolt Spacing Maximum	5.787 Inch 147Millimeter
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Base to Center Height	1.937 Inch 49.2 Millimeter
Harmonized Tariff Code	8483.20.40.40
Manufacturer Item Number	TASE40
Number of Mounting Holes	2
Expansion / Non- expansion	Non-expansion
Basic dynamic load	32,5 kN

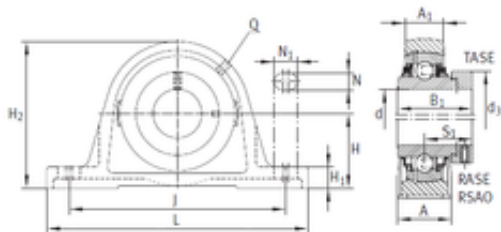

rating (C)	
Nominal Bolt Center to Center	5.4 Inch 136 Millimeter