


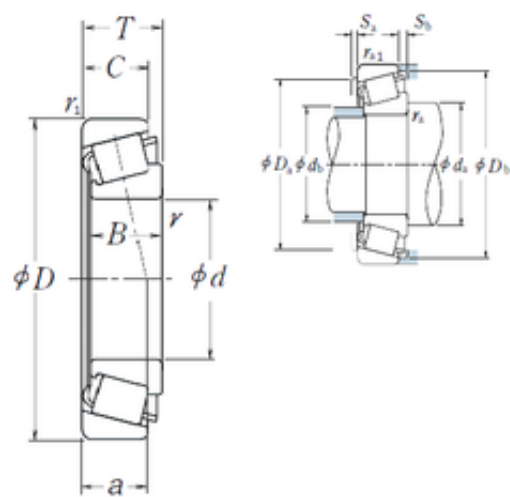

Bearing No. HR32006XJ

a	13,5 mm
e	0.43
d	30 mm
D	55 mm
T	17 mm
B	17 mm
C	13 mm
B_	17
da	39
Y0	0.77
C0	44.5
D_	55
Sb	4
Sa	3
db	35
Z_	19
Y1	1.4
C_	13
Cr	3700
DE_	48.166
Iso	4CC
DI_	36.853
C0r	4550
DA_	5.855
D_b	53
D_a2	47
SBRG	20
SDM_	42.51
D_a1	49
yobi	HR32006XJ

KBRG	3111
mass	0.172
TC-RA	93.5
r min.	1 mm
LangID	1
TC-DA2	5.455
Da min	47 mm
TC-SLR	12
ALPHA_	16
TC-DA1	6.254
Weight	0,172 Kg
T-ALP22	0
da min.	39 mm
r1 min.	1 mm
T-ALP21	32
db max.	35 mm
hidYobi	HR32006XJ
rb max.	1 mm
T-ALP23	0
Da max.	49 mm
Oil rpm	9000
GRS rpm	6700
ra max.	1 mm
inner r	1
Db min.	53 mm
outer r	1
inner ra	1
hidTable	ecat_NSTPRM
outer rb	1
Category	Roller Bearings
TC-BET23	0
TC-BET21	3

TC-BET22	50
Inventory	0.0
Size (mm)	30x55x17
Prod_Type3	TRBSR_MD_A
Width (mm)	17
Product Group	B04334
Bearing number	HR32006XJ
Weight / Kilogram	0.2
Manufacturer Name	NSK
Bore Diameter (mm)	30
Outer Diameter (mm)	55
Minimum Buy Quantity	N/A
Calculation factor (e)	0,43
(Oil) Lubrication Speed	9000 r/min
Calculation factor (Y0)	0,77
(Grease) Lubrication Speed	6700 r/min
Basic dynamic load rating (C)	36 kN
Basic static load rating (C0)	44,5 kN