


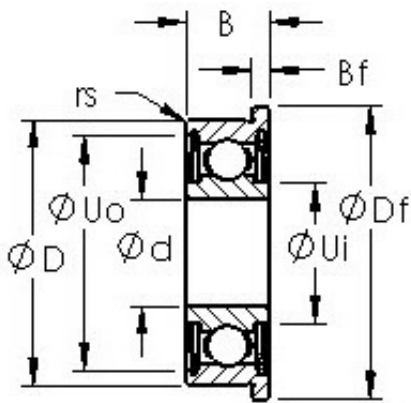

#### Bearing No. SFR166ZZ

|                                        |                             |
|----------------------------------------|-----------------------------|
| Material                               | Martensitic Stainless Steel |
| Ball Qty                               | 8                           |
| Precision                              | A1                          |
| Width (B)                              | 0.1250                      |
| Width (mm)                             | 3,175                       |
| Weight (g)                             | 0.97                        |
| Bearing Type                           | Flanged Shielded            |
| Bore Dia (d)                           | 0.1875                      |
| Outer Dia (D)                          | 0.3750                      |
| Ball Dia (Dw)                          | 0.0625                      |
| Bearing number                         | SFR166ZZ                    |
| Flange Dia (Df)                        | 0.4220                      |
| Flange Width (Bf)                      | 0.031                       |
| Radius (min) (rs)                      | 0.004                       |
| Bore Diameter (mm)                     | 4,7625                      |
| Standard Clearance                     | K25                         |
| Outer Diameter (mm)                    | 9,525                       |
| Static Load Rating (Cor)               | 49                          |
| Dynamic Load Rating (Cr)               | 136                         |
| Max Speed (Oil) (X1000 RPM)            | 60                          |
| Max Speed (Grease) (X1000 RPM)         | 50                          |
| Max. Shaft Shoulder Dia. Inner (Ui)    | 0.2                         |
| Min. Housing Shoulder Dia., Outer (Uo) | 0.347                       |