


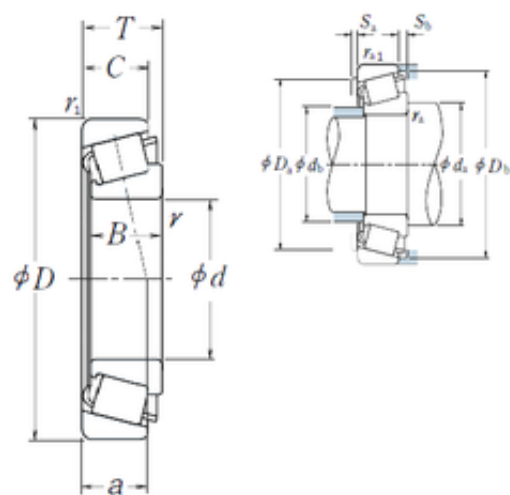

Bearing No. HR30306J

a	15,1 mm
e	0.32
d	30 mm
D	72 mm
T	20,75 mm
B	19 mm
C	16 mm
B_	19
da	41
Y0	1.1
C0	60
D_	72
Sb	4.5
Sa	3
db	40
Z_	14
Y1	1.9
C_	16
Cr	6050
DE_	61.647
Iso	2FB
DI_	41.171
C0r	6100
DA_	10.513
D_b	66
D_a2	62
SBRG	3
SDM_	51.409
D_a1	63
yobi	HR30306J

KBRG	3111
mass	0.403
TC-RA	157.066
r min.	1,5 mm
LangID	1
TC-DA2	10.062
Da min	62 mm
TC-SLR	13
ALPHA_	11.859
TC-DA1	10.963
Weight	0,403 Kg
T-ALP22	43
da min.	41 mm
r1 min.	1,5 mm
T-ALP21	23
db max.	40 mm
hidYobi	HR30306J
rb max.	1,5 mm
T-ALP23	10
Da max.	63 mm
Oil rpm	7500
GRS rpm	5300
ra max.	1,5 mm
inner r	1.5
Db min.	66 mm
outer r	1.5
inner ra	1.5
hidTable	ecat_NSTPRM
outer rb	1.5
Category	Roller Bearings
TC-BET23	0
TC-BET21	4

TC-BET22	0
Inventory	0.0
Size (mm)	30x72x20.75
Prod_Type3	TRBSR_MD_A
Width (mm)	20,75
Product Group	B04334
Bearing number	HR30306J
Weight / Kilogram	0
Manufacturer Name	NSK
Bore Diameter (mm)	30
Outer Diameter (mm)	72
Minimum Buy Quantity	N/A
Calculation factor (e)	0,32
(Oil) Lubrication Speed	7500 r/min
Calculation factor (Y0)	1,1
(Grease) Lubrication Speed	5300 r/min
Basic dynamic load rating (C)	59,5 kN
Basic static load rating (C0)	60 kN