


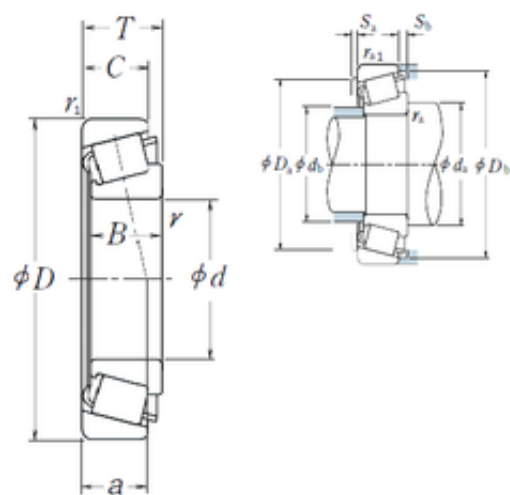

Bearing No. HR30307J

a	16,7 mm
e	0.32
d	35 mm
D	80 mm
T	22,75 mm
B	21 mm
C	18 mm
B_	21
da	47
Y0	1.1
C0	79
D_	80
Sb	4.5
Sa	3
db	45
Z_	14
Y1	1.9
C_	18
Cr	7750
DE_	69.549
Iso	2FB
DI_	46.379
C0r	8050
DA_	11.844
D_b	74
D_a2	69
SBRG	3
SDM_	57.964
D_a1	71
yobi	HR30307J

KBRG	3111
mass	0.538
TC-RA	177.138
r min.	2 mm
LangID	1
TC-DA2	11.324
Da min	69 mm
TC-SLR	15
ALPHA_	11.859
TC-DA1	12.364
Weight	0,538 Kg
T-ALP22	43
da min.	47 mm
r1 min.	1,5 mm
T-ALP21	23
db max.	45 mm
hidYobi	HR30307J
rb max.	1,5 mm
T-ALP23	10
Da max.	71 mm
Oil rpm	6700
GRS rpm	4800
ra max.	2 mm
inner r	2
Db min.	74 mm
outer r	1.5
inner ra	2
hidTable	ecat_NSTPRM
outer rb	1.5
Category	Roller Bearings
TC-BET23	0
TC-BET21	4

TC-BET22	0
Inventory	3.0
Size (mm)	35x80x22.75
Prod_Type3	TRBSR_MD_A
Width (mm)	22,75
Product Group	B04334
Bearing number	HR30307J
Weight / Kilogram	0
Manufacturer Name	NSK
Bore Diameter (mm)	35
Outer Diameter (mm)	80
Minimum Buy Quantity	N/A
Calculation factor (e)	0,32
(Oil) Lubrication Speed	6700 r/min
Calculation factor (Y0)	1,1
(Grease) Lubrication Speed	4800 r/min
Basic dynamic load rating (C)	76 kN
Basic static load rating (C0)	79 kN