


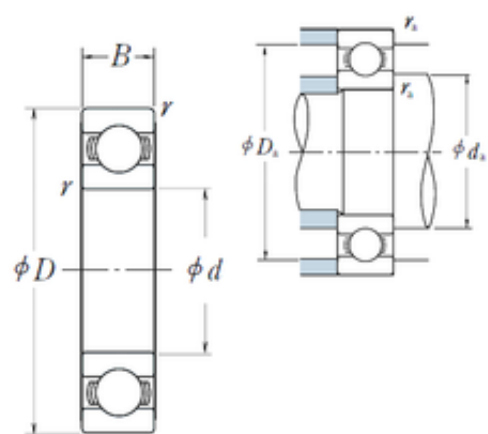

Bearing No. 6011

D	90 mm
d	55 mm
B	18 mm
C	18 mm
r	1.1
Z_	13
D_	90
ra	1
C0	21.2
fo	15.3
B_	18
DI_	62.181
SRI	5.34
SRE	5.34
D_a	83.5
DA_	10.319
DE_	82.819
SREX	0.025
SREN	-0.025
SBRG	10
KBRG	6101
mass	0.381
Bore	2.165 Inch 55 Millimeter
SRIX	0.025
SRIN	-0.025
Noun	Bearing
yobi	6011
SDM_	72.5
bomp	0

Weight	0,381 Kg
C_conv	28300
LangID	1
da min	61.5
r min.	1,1 mm
ALPHA_	0
UNSPSC	31171504
da max	64 mm
ra max.	1 mm
Oil rpm	9000
hidYobi	6011
GRS rpm	7500
Da max.	83,5 mm
da min.	61,5 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Size (mm)	55x90x18
Inventory	0.0
Enclosure	Open
Snap Ring	No
Prod_Type3	DGBB_SR_OT
Width (mm)	18
bore type:	Round
Weight / LBS	0.385
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
closure type:	Open
Bearing number	6011
Keyword String	Ball
overall width:	18 mm
bore diameter:	55 mm

Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	55MM Bore; 90MM Outside Diameter; 18MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outer Race Width	0.709 Inch 18 Millimeter
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	3.543 Inch 90 Millimeter
outside diameter:	90 mm
Manufacturer Name	NSK
Weight / Kilogram	0.38
Bore Diameter (mm)	55
Internal Clearance	C0-Medium
internal clearance:	Normal Clearance
Outer Diameter (mm)	90
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	9 000 r/min
Manufacturer Item Number	6011
manufacturer upc number:	029176013058
Internal Special Features	No
(Grease) Lubrication Speed	7 500 r/min
Basic static load rating (C0)	21,2 kN
Basic dynamic load	28,3 kN

rating (C)	
Maximum Capacity / Filling Slot	No