


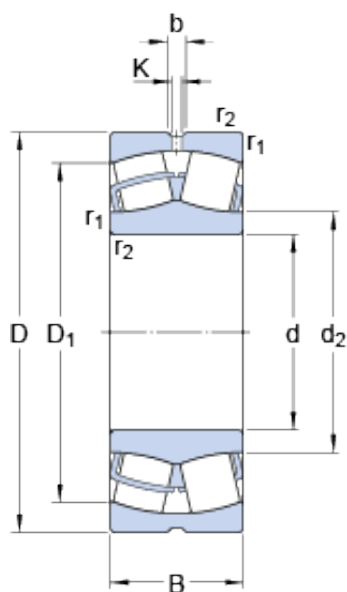

Bearing No. 23052 CC/W33

D	400 mm
d	260 mm
B	104 mm
b	16.7 mm
K	9 mm
Bore	10.236 Inch 260 Millimeter
Noun	Bearing
Width	4.094 Inch 104 Millimeter
UNSPSC	31171510
Category	Spherical Roller Bearing
Inventory	1.0
Size (mm)	400x260x104
Enclosure	Open
Width (mm)	104
Bore Profile	Straight
Mass bearing	48.5 kg
Weight / LBS	110.231
Inch - Metric	Metric
Cage Material	Steel
D ₁	360 mm
d ₂	295 mm
Product Group	B04311
Withdrawal Nut	Not Applicable
Relubricatable	Yes
Keyword String	Spherical
Bearing number	23052 CC/W33
Limiting speed	1700 r/min
Mounting Method	Shaft Mount

Reference speed	1300 r/min
Rolling Element	Spherical Roller Bearing
Long Description	260MM Straight Bore; 400MM Outside Diameter; 104MM Width; C0-Medium Clearance; Shaft Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable
Outside Diameter	15.748 Inch 400 Millimeter
Manufacturer URL	http://www.skf.com
Weight / Kilogram	50.05
Manufacturer Name	SKF
Withdrawal Sleeve	Not Applicable
r _a max.	3 mm
Internal Clearance	C0-Medium
D _a max.	385 mm
d _a min.	275 mm
Bore Diameter (mm)	400
Outer Diameter (mm)	260
Adapter Part Number	Not Applicable Inch Not Applicable Millimeter
Calculation factor e	0.23
r _{1,2} min.	4 mm
d _a - min.	275 mm
D _a - max.	385 mm
Minimum Buy Quantity	N/A
r _a - max.	3 mm
d ₂ ?	295 mm
D ₁ ?	360 mm
Harmonized Tariff Code	84823080
Calculation factor - e	0.23

$r_{1,2}$ - min.	4 mm
Number of Rows of Rollers	Double Row
Basic dynamic load rating C	1675 kN
Basic dynamic load rating - C	1675 kN
Fatigue load limit P_u	212 kN
Calculation factor Y_1	2.9
Calculation factor Y_2	4.4
Calculation factor Y_0	2.8
Fatigue load limit - P_u	212 kN
Calculation factor - Y_1	2.9
Calculation factor - Y_2	4.4
Calculation factor - Y_0	2.8
Basic static load rating C_0	2550 kN
Basic static load rating - C_0	2550 kN