


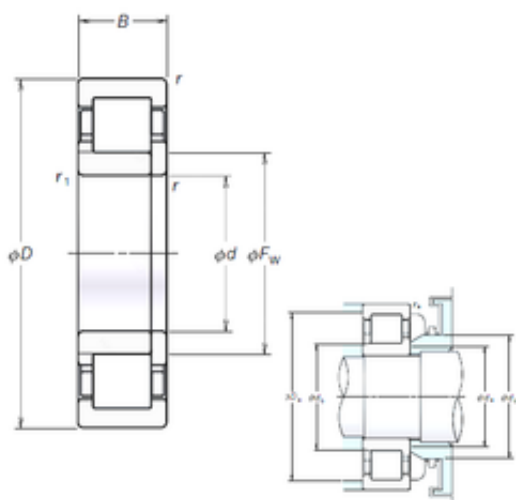

Bearing No. NUP210EM

S	1,7 mm
D	90 mm
r	1.1
C	20 mm
B	20 mm
d	50 mm
Fw	59,5 mm
ra	1
Z_	17
rb	1
C0	76.5
r1	1.1
da	56.5
D_	90
B_	20
DE_	81.5
DA_	11
DI_	59.5
yobi	NUP210EM
SDM_	70.5
KBRG	4165
mass	0.582
SBRG	2
dd min	67
ALPHA_	0
dc min	62
db max	57
C_conv	69000
LangID	1
db min	56,5 mm

r min.	1,1 mm
hidYobi	NUP210EM
ra max.	1 mm
D_a max	83.5
Oil rpm	7500
rb max.	1 mm
GRS rpm	6300
r1 min.	1,1 mm
db max.	57 mm
TSR rpm	8000
da min.	56,5 mm
Da max.	83,5 mm
hidTable	ecat_NSCLDR
Category	Bearings
Size (mm)	50x90x20
Macha rpm	9000
Inventory	0.0
Prod_Type3	CRB_SR_NUP
Width (mm)	20
Product Group	B04144
Bearing number	NUP210EM
Manufacturer Name	NSK
Weight / Kilogram	0.586
Bore Diameter (mm)	50
Outer Diameter (mm)	90
Minimum Buy Quantity	N/A
(Grease) Lubrication Speed	7100 r/min
Basic dynamic load rating (C)	69 kN
Basic static load rating (C0)	76,5 kN