


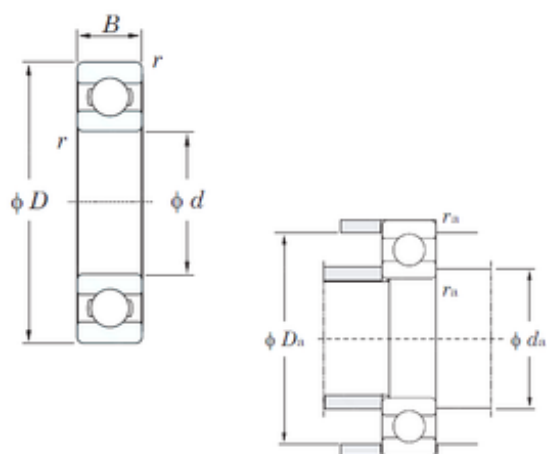

Bearing No. 6013

D	100 mm
d	65 mm
B	18 mm
C	18 mm
f0	15.8
Cu	1.40
Cr	38.1
C0r	25.2
Bore	2.559 Inch 65 Millimeter
Noun	Bearing
UNSPSC	31171504
Weight	0,435 Kg
r(min)	1.1
r min.	1,1 mm
da min.	71,5 mm
ra(max)	1
Da max.	93,5 mm
Da(max)	93.5
da(min)	71.5
ra max.	1 mm
Category	Single Row Ball Bearing
Oil lub.	7800
Inventory	0.0
Enclosure	Open
Size (mm)	65x100x18
Snap Ring	No
Width (mm)	18
Grease lub.	6600
Bearing No.	6013

Weight / LBS	1.076
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Keyword String	Ball
Bearing number	6013
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.709 Inch 18 Millimeter
Long Description	65MM Bore; 100MM Outside Diameter; 18MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	3.937 Inch 100 Millimeter
(Refer.)Mass(kg)	0.435
Manufacturer URL	http://www.koyousa.com
Weight / Kilogram	0.489
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	65
Outer Diameter (mm)	100
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	7800 r/min
Manufacturer Item Number	6013
Internal Special Features	No
(Grease) Lubrication Speed	6600 r/min

Basic static load rating (C0)	25,2 kN
Basic dynamic load rating (C)	30,5 kN
Maximum Capacity / Filling Slot	No