


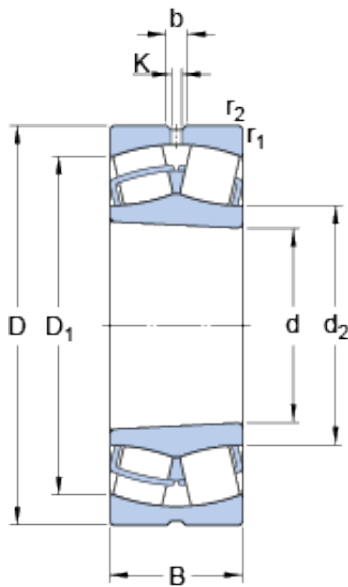

Bearing No. 23072 CCK/W33

b	22.3 mm
K	12 mm
d	360 mm
D	540 mm
B	134 mm
series:	230
Category	Roller Bearings
Size (mm)	540x360x134
Inventory	0.0
Width (mm)	134
cage type:	Inner Ring Guided
bore type:	Tapered 1:12
maximum rpm:	1200 RPM
Mass bearing	105 kg
D ₁	483 mm
d ₂	404 mm
closure type:	Open
Product Group	B04311
cage material:	Steel
overall width:	134 mm
fillet radius:	4 mm
Bearing number	23072 CCK/W33
bore diameter:	360 mm
Limiting speed	1200 r/min
finish/coating:	Uncoated
Reference speed	950 r/min
outer ring type:	Not Split
outside diameter:	540 mm
outer ring width:	134 mm
bearing material:	Steel

precision rating:	Not Rated
Manufacturer Name	SKF
Weight / Kilogram	0
Bore Diameter (mm)	540
r_a max.	4 mm
D_a max.	522 mm
Outer Diameter (mm)	360
internal clearance:	C0
Calculation factor e	0.23
r_a - max.	4 mm
D_a - max.	522 mm
d_a - max.	404 mm
Minimum Buy Quantity	N/A
d_a - min.	369 mm
$r_{1,2}$ min.	5 mm
static load capacity:	4800 kN
d_2 ?	404 mm
D_1 ?	483 mm
Calculation factor - e	0.23
dynamic load capacity:	2750 kN
lubrication hole type:	Lubrication Groove & Hole
$r_{1,2}$ - min.	5 mm
Basic dynamic load rating C	2850 kN
operating temperature range:	Maximum of +390 °F
Basic dynamic load rating - C	2850 kN
Fatigue load limit P_u	345 kN
Calculation factor Y_1	2.9
Calculation factor Y_2	4.4
Calculation factor Y_0	2.8

Calculation factor - Y_2	4.4
Calculation factor - Y_0	2.8
Calculation factor - Y_1	2.9
Fatigue load limit - P_u	345 kN
Basic static load rating C_0	4800 kN
Basic static load rating - C_0	4800 kN